


Checklist: Typical Wood Frame Garage

- ◆ To be filled out and signed by applicant
- ◆ One copy must be attached to the permit application
- ◆ One copy must be provided to applicant

Note: Roof must be designed for 30# live load.

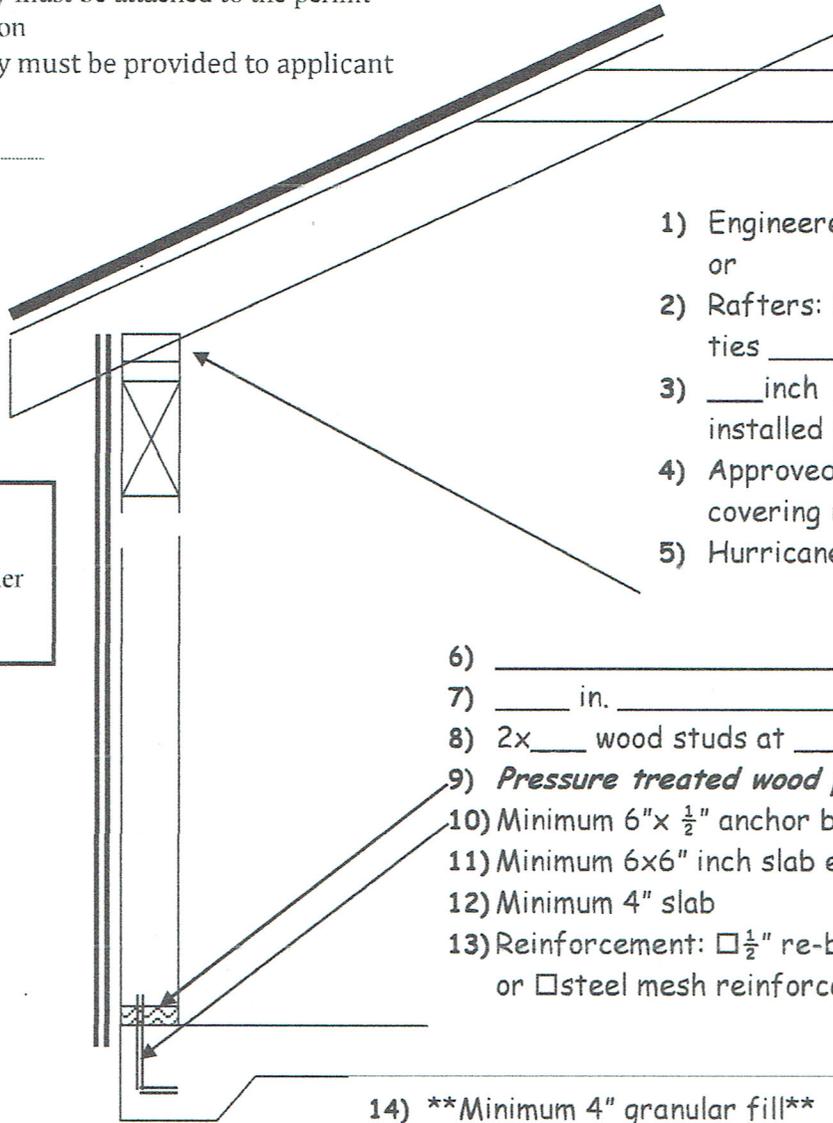


- 1) Engineered trusses: _____ o.c.
or
- 2) Rafters: 2 X _____ with ceiling joists and collar ties _____ o.c.
- 3) _____ inch _____ (type) sheathing installed per manufacturer's specification.
- 4) Approved _____ (type) roof covering installed over 15# felt underlayment.
- 5) Hurricane clips or approved fasteners.

A wall brace plan from a lumber supplier is required.

- 6) _____ (type) siding
- 7) _____ in. _____ (type) wall sheathing
- 8) 2x _____ wood studs at _____ inches o.c.
- 9) **Pressure treated wood plate**
- 10) Minimum 6" x 1/2" anchor bolts @ maximum 8' oc
- 11) Minimum 6x6" inch slab edge
- 12) Minimum 4" slab
- 13) Reinforcement: 1/2" re-bar @ 24" oc (both ways)
or steel mesh reinforcement.

14) ****Minimum 4" granular fill****



Double shoulder studs required for openings greater than 6'

Overhead Door Header

15) Width of opening ? _____ ft.

16) Header carries roof load? yes no

17) Describe header:

18) Shoulder Studs: Single Double

Submitter:

Signature
Date